



**HT-E1
Response Curve**



**HT-E2/E3/E4
Response Curve**

Model No. Parameter	HT-E1	HT-E2	HT-E3	HT-E4
Capsule Type	Condenser	Condenser	Condenser	Condenser
Frequency Response	40Hz-16kHz	40Hz-16kHz	40Hz-16kHz	40Hz-16kHz
Polar Pattern	Super Cardioid	Super Cardioid	Super Cardioid	Super Cardioid
Output Impedance(Ohm)	75	75	75	75
Sensitivity (±2dB)	-40dB	-40dB	-40dB	-40dB
Power Supply	Phantom Power 48V	Phantom Power 48V	Phantom Power 48V	Phantom Power 48V
Microphone Length (mm)	437	392	425	450
N.W.	0.11 kg	0.12 kg	0.17 kg	0.16 kg
Sound Pick-up Distance	40 cm	40 cm	40 cm	40 cm
On/Off Switch			Yes	Yes
Output	Balance	Balance	Balance	Balance

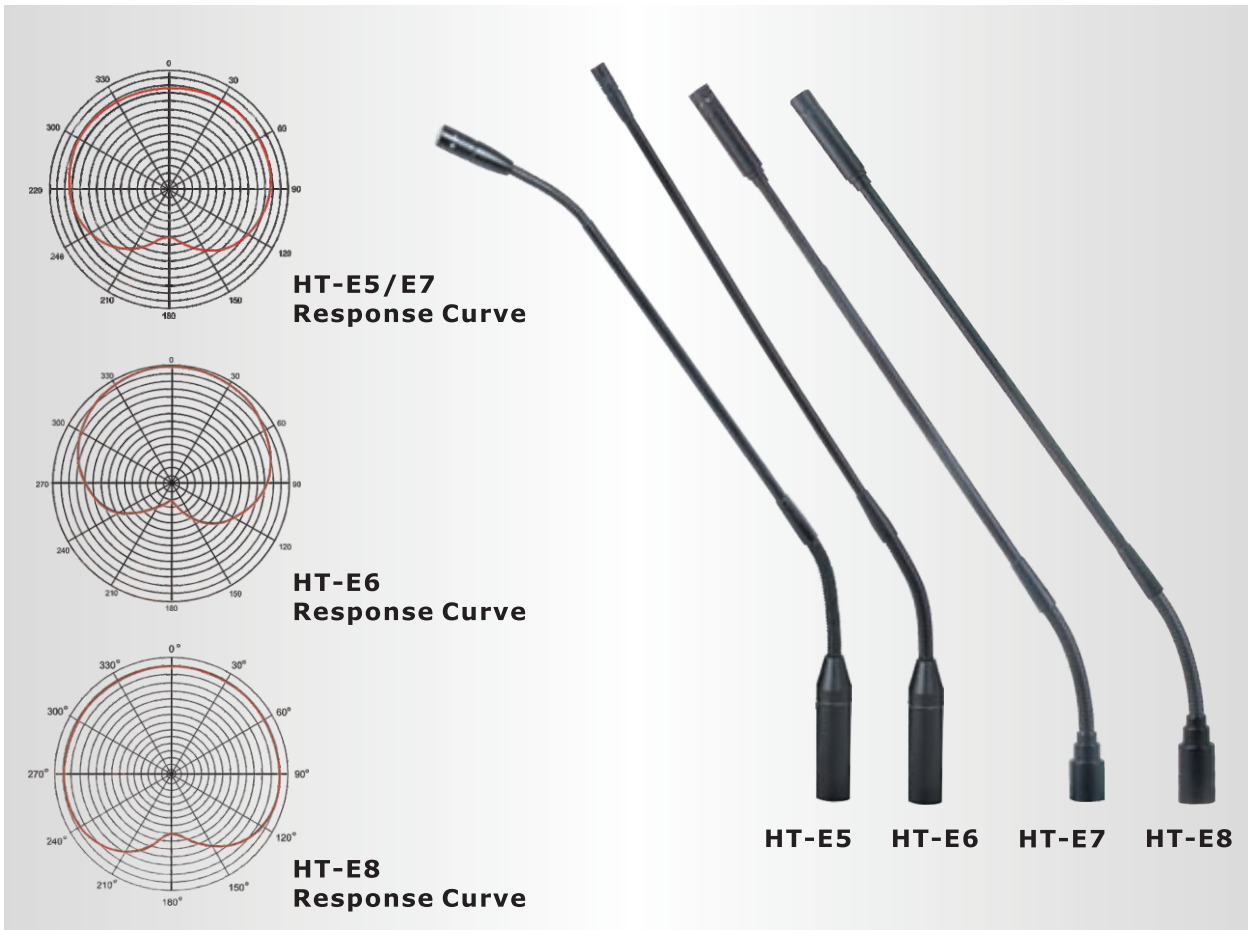

Model No. Parameter	HT-E5	HT-E6	HT-E7	HT-E8
Capsule Type	Condenser	Condenser	Condenser	Condenser
Frequency Response	30Hz-20kHz	60Hz-16kHz	30Hz-20kHz	40Hz-18kHz
Polar Pattern	Super Cardioid	Cardioid	Super Cardioid	Super Cardioid
Output Impedance(Ohm)	200	200	100	100
Sensitivity (±2dB)	-40dB	-42dB	-40dB	-40dB
Power Supply	Phantom Power 48V	Phantom Power 48V	Phantom Power 48V	Phantom Power 48V
Microphone Length (mm)	450	451	423	423
N.W.	0.13 kg	0.12 kg	0.10 kg	0.10 kg
Sound Pick-up Distance	40 cm	40 cm	40 cm	40 cm
Output	Balance	Balance	Balance	Balance